




LUXPOINT® LED Panel - Willi

Datasheet

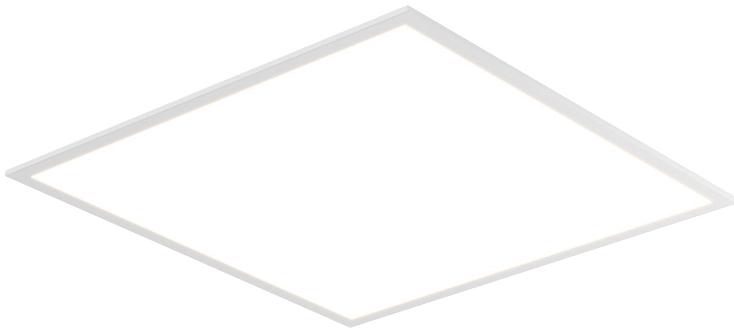

CE UK
CA IP40 IK03

Willi series LED Panels enhance your lighting experience with advanced technology, good performance and cost-effective solutions that deliver unmatched energy savings. Designed with advanced flicker-free drivers, the panel ensure smooth operation and create a flicker-free environment. The matte white frame adds a touch of simply to any space, making the Willi series the perfect choice for those who appreciate both style and performance.

Benefits

- Good Cost Performance
- Versatile Application
- Environmentally Friendly
- Easy Installation

Applications

- Industrial
- Warehouse
- Transport
- Commercial

LUXPOINT® LED Panel - Willi

Technical Data

Optical Specifications

Product	0606		
Wattage	33W	40W	
Luminous Flux @CCT	3000K	3800lm	3800lm
	4000K	4000lm	4000lm
	6500K	4000lm	4000lm
Total luminous flux of contained light sources @CCT	3000K	4275lm	4000lm
	4000K	4450lm	4400lm
	6500K	4450lm	4400lm
Efficacy	115-120lm/W	95 - 100lm/W	
Flickering metric (Pst LM)	<1	<1	
Stroboscope effect metric (SVM)	<0.4	<0.4	
UGR	<22	<22	
CRI	≥80	≥80	
SDCM	< 6	< 6	
Beam Angle	115°	115°	
Photobiological safety group acc. To EN62778	RG0	RG0	
Photobiological safety group acc. To EN62471	RG0	RG0	
Dimmable	No	No	

Electrical and Mechanical Specifications


Input Voltage	220-240V ~50/60Hz		
Nominal Current	160mA	180mA	
Inrush current time Th50	9µs@2A	12µs@10A	
Power Factor	0.9	0.9	
Max. number of luminaires per miniature circuit breaker	B16	80	75
	C10	50	47
	C16	80	75
Protection class	Class I	Class I	
Dimensions	L 595mm	L 595mm	
	W 595mm	W 595mm	
	H 33mm	H 33mm	
Weight	1350g	1325g	
Housing	Aluminium	Aluminium	
Diffuser	Polystyrene (PS)	Polystyrene (PS)	
B16LED module replaceable	No	No	
Glow wire test according to IEC60695-2-12	650°C	650°C	

System Specifications

Power	AC mains
Operating Temperature	-20°C ~ 40°C
Storage Temperature	-20°C ~ 60°C
Lifespan L70/B50 at 45°C	25,000 hours
Lifespan L70/B50 at 25°C	30,000 hours
Number of switching cycles	30,000
Environment	Indoor
Ingress Protection	IP40 (Front)
Impact Resistance	IK03
Safety Approval	CE, UKCA, RoHS
Mercury content	0.0mg
Warranty	2 years

LUXPOINT® LED Panel - Willi

Dimension

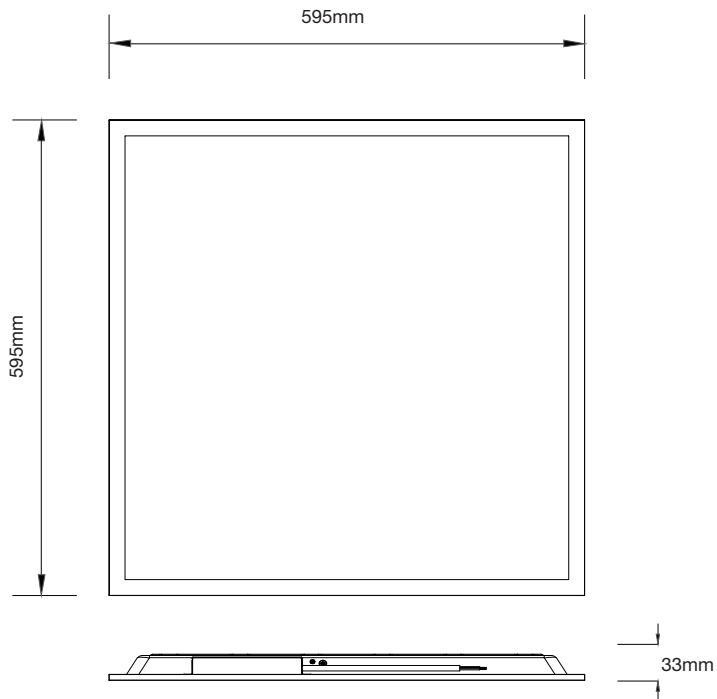

Due to the special conditions of manufacturing process of LED, the typical data of technical parameters can only reflect statistical figures and do not necessarily correspond to the actual parameters of each single product which could differ from typical data.

Exceeding maximum ratings for operation voltage will cause hazardous overload and will likely destroy the LED module.

Exceeding maximum ratings for operation and storage temperature will reduce expected life time or destroy the LED module.

Specifications are subject to change without notice. Errors and omission excepted, always make sure to use the most recent release.

LUXPOINT® LED Panel - Willi

Ordering codes

Fixture

Short Text	Wattage	CCT	Lumen	UGR	Packaging	Item code	EAN-13
LP PA WIL 33W 830 0606	33W	3000K	3800 lm	<22	6pcs@1 outer box	TXGL25100015255	4897135735862
LP PA WIL 33W 840 0606	33W	4000K	4000 lm	<22	6pcs@1 outer box	TXGL25100015355	4897135735879
LP PA WIL 33W 865 0606	33W	6500K	4000 lm	<22	6pcs@1 outer box	TXGL25100015455	4897135735886
LP PA WIL 40W 830 0606	40W	3000K	3800 lm	<22	6pcs@1 outer box	TXGL25100081855	4895271101527
LP PA WIL 40W 840 0606	40W	4000K	4000 lm	<22	6pcs@1 outer box	TXGL25100081955	4895271101534
LP PA WIL 40W 865 0606	40W	6500K	4000 lm	<22	6pcs@1 outer box	TXGL25100082055	4895271101541

Service contact:
Traxon Technologies Ltd.
Room 113, Wireless Centre, 3 Science Park East Avenue, Shatin,
Hong Kong, China
www.traxon-ecue.com

Traxon Technologies Europe GmbH
Karl-Schurz-Str. 38, 33100 Paderborn, Germany